



Axis Dolly assembly



First, make sure the configuration of the legs is always **ABC counter clockwise** (or the dolly charts will not be accurate and you will get erratic results when dialing in degrees), and that plates on dolly body are **facing down or away from the leg extensions** (or the faces of the degree plates will get scratched and the knobs will not secure the leg extensions to the dolly body as securely).

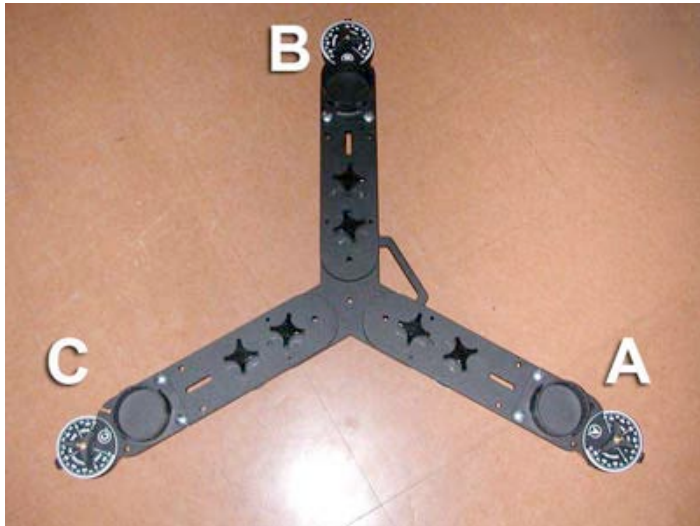

This is the knob setting for standard tripod and assembly.

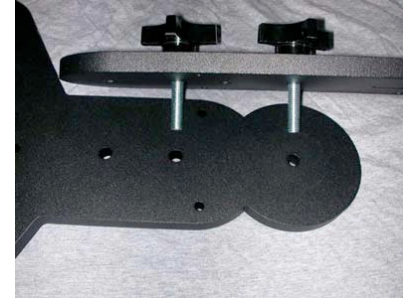

Making sure the body plates are face down, insert knob threads through holes shown above.



This image shows the plates together.



For wide spreader setting, insert knob threads through holes shown above.



This image shows the plates together in the wide mode.



Align square holes to mount the spreader to the leg.

This shows the squares aligned. Secure with included nuts and bolts.

Follow the following photos to secure tripod legs in place. Make sure you secure the tripod with additional bungee cords (one per leg) using the holes in the side of the spreader. The knob bungees are no longer included in the Axis Dolly package as they don't help secure the tripod to the Axis Dolly. Should you choose to use a set of ball bungees bungees though, please note that they will only give the legs additional support, but they **do not** secure the tripod to the dolly very well.

